

Grease Application

Step 1




A tube of high melting point grease is supplied with every EXEDY clutch kit. Open the tube and apply a small amount of grease to the splined hub.

*Important, do NOT use the entire contents of the tube.

Also lubricate the throw out fork to bearing contact area and pivot surface with the remainder of the grease.

Step 2

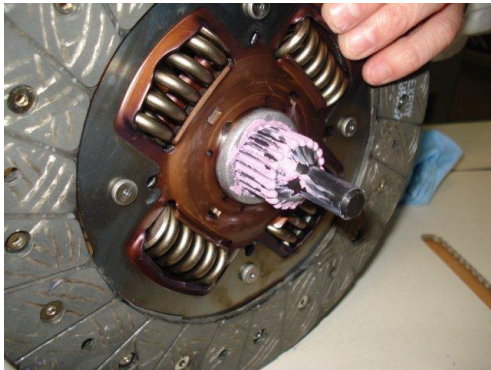

Slide the clutch disc onto the input shaft.

Wipe away any excess grease from the splined hub.

Step 3



Remove any excess grease from the splined hub.

Step 4



Do not contaminate the friction material as this will introduce the possibility of shudder and/or slip.